PENDING CLAIMS

AMAT Reference No.: 8402/CPS

F&R Reference No.: 05542-552001

Serial No.: Unassigned Filed: Not yet filed

Entitled: RETAINING RING WITH SLURRY TRANSPORT GROOVES

1. A retaining ring comprising:

a generally annular body having a top surface, a bottom surface, an inner diameter surface, and an outer diameter surface, wherein the bottom surface includes a plurality of channels, each channel extending from the inner diameter surface to the outer diameter surface and having a rounded ceiling.

- 2. The retaining ring of claim 1, wherein the rounded ceiling has a semicircular cross-section.
- 3. The retaining ring of claim 2, wherein the semi-circular cross-section has a diameter about equal to a width of the channel.
- 4. The retaining ring of claim 1, wherein the rounded ceiling has a flat portion.
- 5. The retaining ring of claim 4, wherein the rounded ceiling is rounded at an intersection of the flat portion and vertical side-walls of the channel.
- 6. The retaining ring of claim 1, wherein each channel includes substantially vertical side-walls.
- 7. The retaining ring of claim 1, wherein the plurality of channels have substantially uniform depth.

- 8. The retaining ring of claim 1, wherein the plurality of channels are oriented at an angle relative to a radial segment extending through the center of the retaining ring.
 - 9. The retaining ring of claim 8, wherein the angle is between 30° and 60°.
- 10. The retaining ring of claim 1, wherein the outer diameter surface includes a ledge.
- 11. The retaining ring of claim 10, wherein the outer diameter surface includes a first portion adjacent the bottom surface that has an outer diameter less than a second portion adjacent the top surface.
- 12. The retaining ring of claim 10, wherein the each channel includes substantially vertical side-walls, the side walls extending to substantially the same depth as the ledge.
- 13. The retaining ring of claim 1, wherein the annular body comprises a wearable material.
- 14. The retaining ring of claim 1, wherein the annular body comprises an upper portion and a lower portion, the upper portion being more rigid than the lower portion.
- 15. The retaining ring of claim 14, wherein the channels are formed in the lower portion.
- 16. The retaining ring of claim 15, wherein the lower portion is formed of a wearable material.

- 17. The retaining ring of claim 15, further comprising a plurality of passages extending through the upper portion from the inner diameter surface to the outer diameter surface.
- 18. The retaining ring of claim 1, wherein the plurality of channel are distributed at substantially equal angular intervals around the retaining ring.

19. A carrier head comprising:

a substrate receiving surface;

a generally annular retaining ring surrounding the substrate receiving surface, the retaining ring having a top surface, a bottom surface, an inner diameter surface, and an outer diameter surface, wherein the bottom surface includes a plurality of channels, each channel extending from the inner diameter surface to the outer diameter surface and having a rounded ceiling.

20. A method of polishing, comprising:

creating relative motion between a substrate and a polishing surface;
restraining the substrate with retaining ring that has a top surface, a bottom
surface, an inner diameter surface, and an outer diameter surface, wherein the bottom
surface includes a plurality of channels, each channel extending from the inner diameter
surface to the outer diameter surface and having a rounded ceiling; and

supplying a polishing liquid to the polishing surface so that the polishing liquid flows through the channels and beneath the retaining ring to the substrate.

50187124.doc

CASE SUMMARY

AMAT FILE NO.:

8402/CPS

F&R FILE NO.:

05542-552001 - David J. Goren

TITLE:

RETAINING RING WITH SLURRY TRANSPORT

GROOVES

INVENTORS:

Hung Chih Chen, Steven M. Zuniga,

FILING DATE:

TO BE FILED BY R. MULCAHY

SERIAL NUMBER:

Unassigned

ABSTRACT:

A retaining ring for chemical mechanical polishing has a generally annular body with a top surface, a bottom surface, an inner diameter surface, and an outer diameter surface. The bottom surface includes a plurality of channels, each channel extending from the inner diameter surface to the outer diameter surface and having a rounded

ceiling.

FIGURE

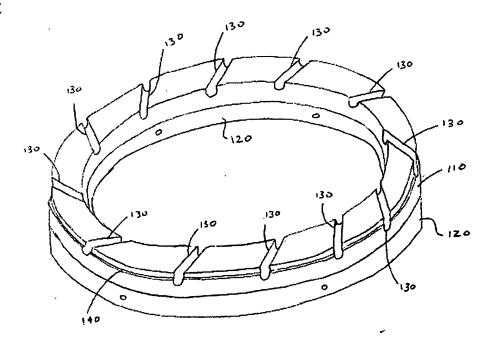


FIG. 1